


EXPLOSION PROOF CEILING SPEAKER

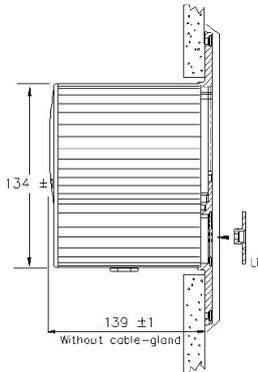

Model BAREEX-36(T)

Specifications.

Construction	: Aluminium.
Mounting	: False ceiling with 4 screws
Power rating	: 6 Watt RMS
SPL (1Watt/1mtr)	: 85dB. (92 dB at full power)
Impedance	: 8 Ohm or 50V/100V. (6 power taps)
Frequency range	: 180Hz - 15KHz
Colour	: RAL 9010
Temperature range	: Minus 20C° to +40C°
Protection	: IP 67 (E chamber)
Approvals	: ATEX EEXde IIB +H2 T6
Dimensions (ØxD)	: 134 (cut-out) x 139mm
Shipping weight	: 2,5Kg

The model BAREEX-36(T) is an ATEX certified explosion proof loudspeaker suitable for Public address systems and alarm evacuation systems in chemical industry and all other applications where hazardous areas are presented.

The speaker may be used either in ATEX Zone 1 as well in Zone 2 and is suitable for use in all gas groups including hydrogen.